





Compact and really fast ldeal for every application Zoom - from 22° to 55°



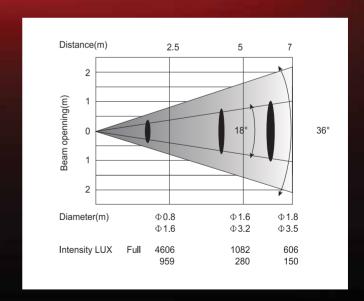

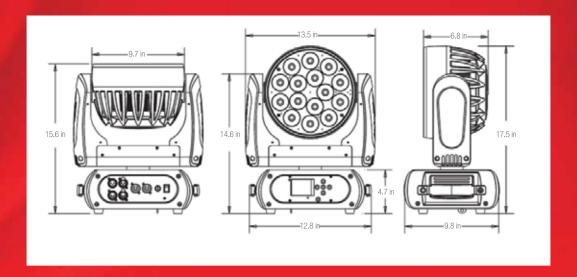

SPECIFICATIONS

SOURCE

Light source	15 pcs OSRAM 15W 4in1 LEDs 5 sections control
LED Life	60,000 Hours
Luminous Flux	5500lumen, 13030lux@ 8.2 ft. at 18°, 3400lux@ 8.2 ft. at 36°
Control	Remote On/Off Via DMX
Ballast	Switching Mode Power Supply

OPTICAL SYSTEM

Zoom	22° to 55°
	22 10 00

X/Y

Pan / Tilt	360° (2.0 Sec) or 540° (2.5 Sec), Tilt: 265° (1.8 Sec)
Resolution	16-Bit
Repositioning	Auto repositioning
Motor	Crazy fast and quiet movement

FEATURES

DMX Channels	15/22/38
Dimmer	Full range 0-100%
Strobe	Various strobes
Upgrades	Software upgrade via DMX
Heating	Indicate temperature info of base, arm and lamp
Cooling	Auto change fan speed and heat pipe for cooling

POWER

Max power consumption	280W
Power supply	Electronic Auto-Ranging
Input voltage range	100-240V, 50-60Hz

WEIGHT

Net weight	24.3 Lbs.
Gross weight	28.7 Lbs.





