

BAM-8A


MULTIFUNCTION POWERED SPEAKER

Bam 8A is a self-powered loudspeaker with an 8” dual voice coil speaker, a compression driver of 1” and a power output of 150W RMS with a frequency response of 60Hz -18 kHz (-3 dB). The unit is equipped with 3 level control-s, a master volume, 2-band equalizer, an USB/SD Player and Bluetooth control. **Bam 8A** has a high-impact copolymer cabinet ideal for mobile and commercial applications and thanks to its design it can be used as a stage monitor and as sound reinforcement. The unit comes with RCA, XLR/1/4” combo in/out & NL4 outputs..


Applications

- Live sound reinforcement, speech and vocals, music playback in entertainment, A/V and institutional venues.
- Especially when ease of use and portability are important factors.
- Amplification, mixing and monitoring for electrical musical instruments.
- Everywhere you need to be heard.

Input panel:

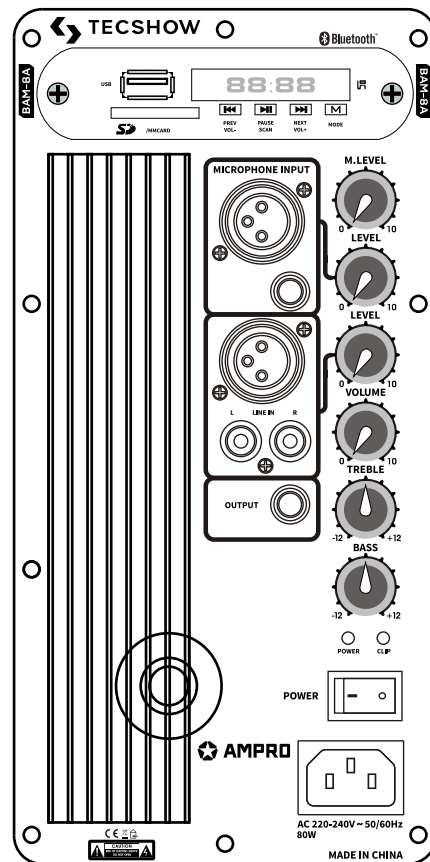

Frequency Response:

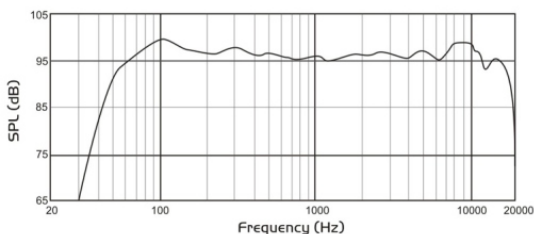

Specifications:

Components

LF: 8" Woofer with dual voice coil

HF: 1" Compression Driver

Amplifier & Control

Power output:

- LF: 350W

- HF: 100W

Crossover Frequency: 3KHz

Frequency response: (-10dB): 55Hz-20KHz

THD: Less than 0.1% @ rated power

Input impedance: 64KOhm (balanced) & 32KOhm

(unbalanced)

Peak indicator

Control: Master volume, Mp3 level, Mic & Line levels &

2-band equalization

Bluetooth connectivity

Input voltage range: AC100-240V, 50-60Hz

Features

Self-powered two-way 8" loudspeaker

Power output: 150W RMS

Peak SPL @ 1M: 126 dB

Nominal Dispersion (HxV): 100°x60°

Connectors

2 XLR inputs

1 RCA input

1 1/4" TRS Plug input

1 1/4" TRS Plug output

1 SD Slot

1 USB Slot

Physical

Dimensions: 410x280x210 mm. / 16.2x11x8.3 in.

Weight: 7 Kg. / 15.4 Lbs.

AMPRO continually engages in research related to product improvement. Some materials, product methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current **AMPRO** product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.



facebook.com/amprogroup



youtube.com/amprogroup

Especificaciones:

Componentes

BF: Altavoz de 8" con doble bobina

AF: Driver de compresión de 1"

Amplificador & Control

Salida:

- BF: 100W

- AF: 50W

Frecuencia de Crossover : 3KHz

Respuesta de frecuencia: (-10dB): 55Hz-20KHz

THD: menos que 0.1% @ potencia nominal

Impedancia de salida: 64KOhm (balanceado) & 32KOhm

(desbalanceado)

Indicador de pico

Control: Volumen principal, nivel MP3, Mic, niveles de línea &

ecualización a 2 bandas

Conectividad Bluetooth

Rango de entrada de voltaje: AC100-240V, 50-60Hz

Características

Sistema autoamplificado a dos vías de 8"

Salida de potencia: 150W RMS

Pico SPL @ 1M: 126 dB

Dispersión nominal (HxV): 100°x60°

Conectores

2 entradas XLR

1 entrada RCA

1 entrada Plug 1/4" TRS

1 salida Plug 1/4" TRS

1 slot SD

1 Slot USB

Físico

Dimensiones: 410x280x210 mm. / 16.2x11x8.3 pulg.

Peso: 7 Kg. / 15.4 Lbs.

AMPRO realiza investigaciones de forma constante las cuales están directamente relacionadas con la mejora del producto.

Algunos materiales, métodos de producto y mejoras de diseño se introducen en productos ya existentes sin previo aviso

como expresión de rutina de esta filosofía. Por esta razón, todos los productos de **AMPRO** pueden diferir respecto a su

descripción publicada, aunque siempre serán iguales o mejores a las especificaciones originales de diseño a menos que

se indique lo contrario.



facebook.com/amprogroup



youtube.com/amprogroup