


USER MANUAL

FLOOR TEC

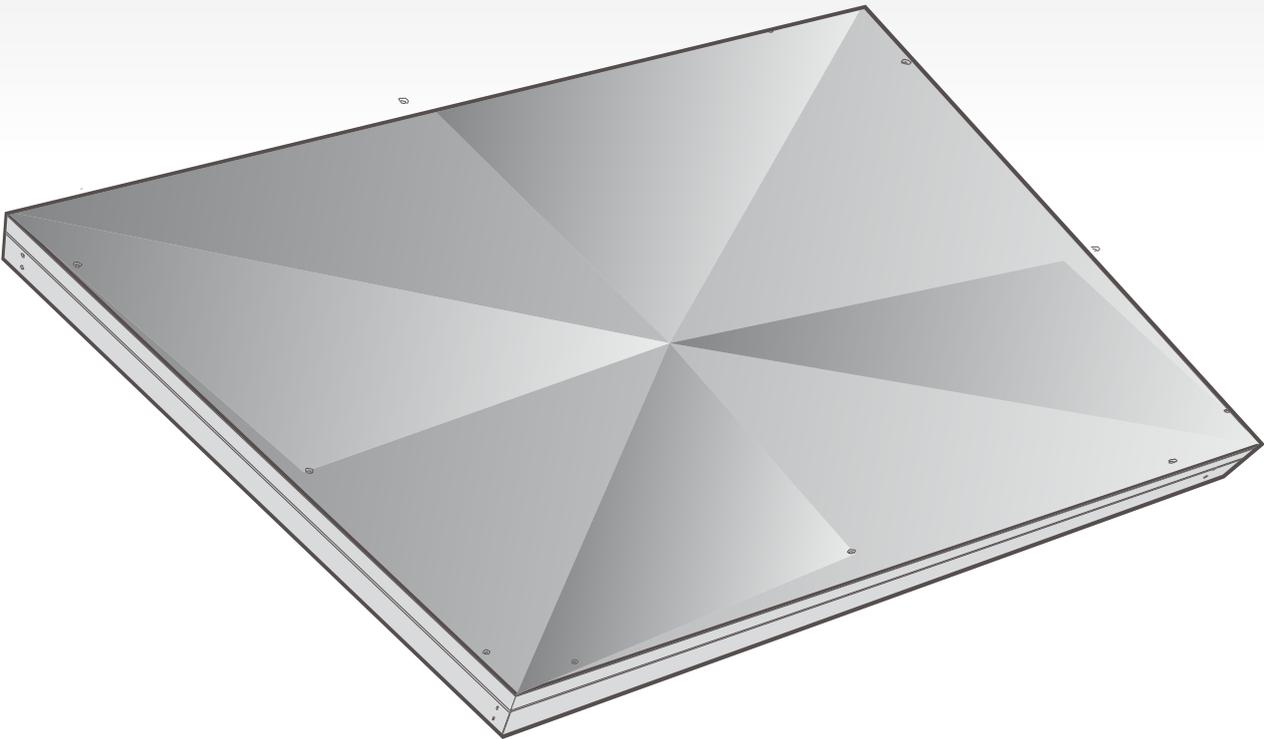

Read the user manual before turning on the product.

TECshow

A division of
**AMERICAN
PRO**
Int. Corp.
www.american-pro.com

Our LED Dancing Floor lighting system offers many possibilities to achieve the effects which you want. It is designed for professional places, such as stages, disco, night clubs etc. Please read the manual before operation.

A. SPECIFICATION :

Size: 100x100x9.5cm

Weight: 48kgs

Power in:110-130V /60HZ

Power consumption: 80W

LEDs: R360pcs, G360pcs, B360pcs

8 color section in one

15 mm Plexi glass support up to 550kgs

4 digital Led display for easier operation


3 pin XLR Power in/out

Height adjustable

Selectable built-in programs, Auto running, DMX mode , slave mode, sound-activated.

Selectable 3CH, 6CH, 13CH, 25CH DMX channel.

B. 1, the picture of front side

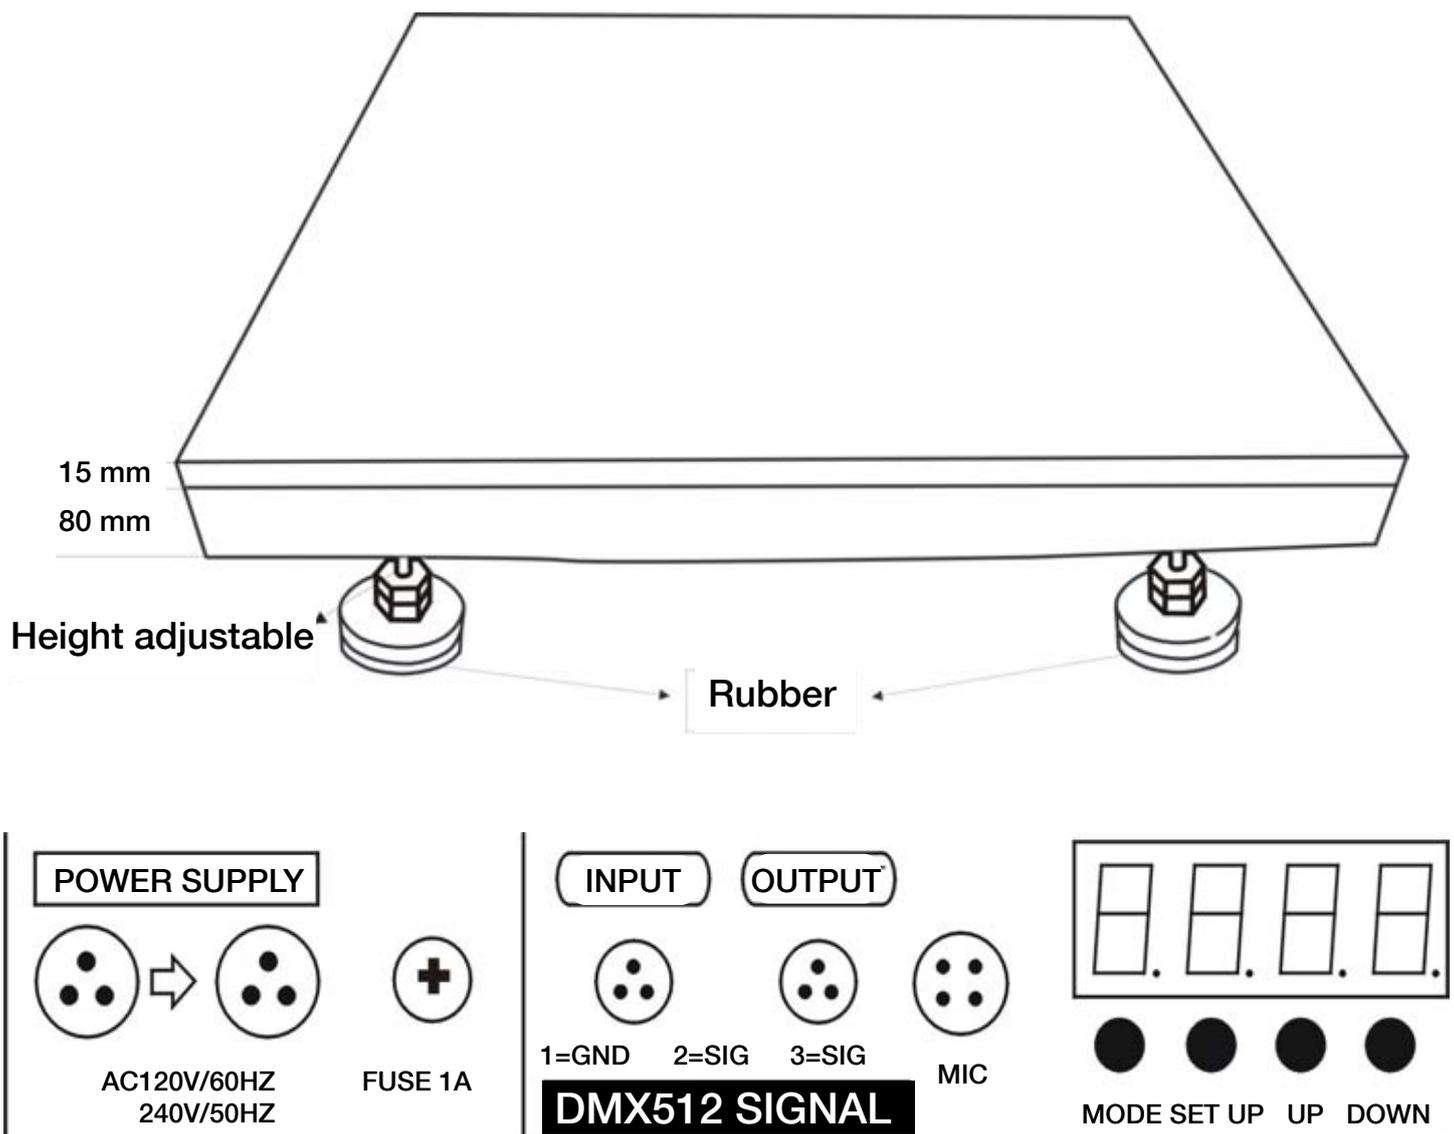

C. OPERATION:

After power on, Press “MODE” button to activate the main menu: Built-in program, Auto run, DMX mode, Slave mode, sound mode.

“SETUP” is to set the relative specification for current mode.

“UP” is to add the value of current specification.

“DOWN” is to decrease the value of current specification.

Built-in programs-- running one of 12 built-in programs.

Auto run—running built-in programs one after another in continuous loop.

DMX mode--controlled by DMX controller

Slave mode—the projectors in this mode will be synchronously run with the projectors in master mode.

Sound mode-- running by sound - activated.

1. Built-in programs mode

With LED dancing floor 100x100cm you can select 12 different Programs. Press “SETUP” and “UP” “DOWN” buttons to select the programs (PG.01) and select the desired program value.

For example,

When it shows PG.01, press “SETUP” button for the first time, it will show SP.99, you can set the running speed for this program. Press “SETUP” button for the second time, it will show F5.00 then you can set the flash frequency for it.. for this PG01, if press “SETUP” for the third time, it will show: C1-1 or C2-1, you can select one of the seven colors by up and down.

SP- speed 00-99

FS—flash frequency from 00-99

2. Auto run mode

You can press “MODE” button to select auto run mode, it shows AUTO., then you can press “SETUP” button, it shows 0.001, then you can set the running times by “UP” and “DOWN”. Press “SETUP” button for the second time, it will show SP.99, you can set the running speed for this program. Press “SETUP” button, it will show F5.00, then you can set the flash frequency for it.

3. DMX mode

You can control the devices individually via your DMX-controller. Press “MODE” button, when it is Addr., it is DMX mode. Press “SETUP” button, it shows 0.001, this means DMX address is 001, you can set the DMX address by “UP” and “DOWN” buttons. If press “SETUP” button, it will show: 03.Ch. or 06.Ch. or 13.CH. or 25.Ch. it means the LED dancing panel is in which DMX mode. You can switch these DMX modes by “UP” and “DOWN” buttons.

DMX value as follows:

03CH:

CH1 0-255	CH2 0-255	CH3 0-255
R	G	B

06CH:

CH1 0-255	CH2 0-255	CH3 0-255	CH4 0-255	CH5 0-255	CH6 0-255
R1	G1	B1	R2	G2	B2

13CH:

CH1 0-255	CH2 0-255	CH3 0-255	CH4 0-255	CH5 0-255	CH6 0-255	CH7 0-255	CH8 0-255	CH9 0-255	CH10 0-255	CH11 0-255	CH12 0-255	CH13 0-255
R1	G1	B1	R2	G2	B2	R3	G3	B3	R4	G4	B4	Dim

25CH:

CH1 0-255	CH2 0-255	CH3 0-255	CH4 0-255	CH5 0-255	CH6 0-255	CH7 0-255	CH8 0-255	CH9 0-255	CH10 0-255	CH11 0-255	CH12 0-255	
R1	G1	B1	R2	G2	B2	R3	G3	B3	R4	G4	B4	
CH13 0-255	CH14 0-255	CH15 0-255	CH16 0-255	CH17 0-255	CH18 0-255	CH19 0-255	CH20 0-255	CH21 0-255	CH22 0-255	CH23 0-255	CH24 0-255	CH25 0-255
R5	G5	B5	R6	G6	B6	R7	G7	B7	R8	G8	B8	Dim

4. Slave mode

Press "MODE" button to select **5LA-** to run the slave mode.

5. Sound mode

Press "MODE" button to select **50.31** to be run, now if activated one time, it will run one step, adjust the sensitivity by "UP" and "DOWN" buttons. Press "SETUP" button, it will show: **00-1** this is sound mode 1: activated one time, running one step, the color is static; select sound mode 2 by "UP" and "DOWN" buttons, it shows: **00-2**, activated one time, running one step, the color will dim gradually.

Sensitivity: SO01-SO31



TRUSTING RESULTS

www.american-pro.com

AMERICAN PRO develops & improves products constantly.
For this reason, the specifications and consigned information in the present
user manual can be modified without notice.

TECshow

A division of

**AMERICAN
PRO**

Int. Corp.

www.american-pro.com